


<RHD>

Heater unit assembly

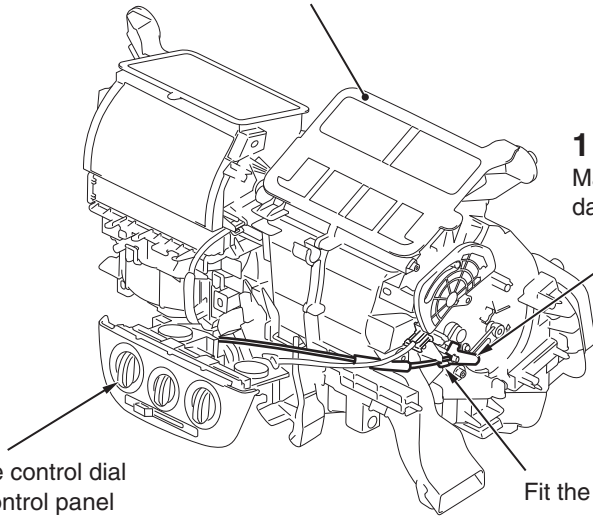

**1**

Make sure that the temperature control damper lever is at MAX HOT position.

**2**

Move the temperature control dial knob on the heater control panel to MAX HOT position.

Fit the cable into the clip